


GV-Pad



Introduction

The GV-Pad is a pad that decodes and displays incoming IP streams from GeoVision and third-party IP devices. It is light-weighted and requires only minimal amount of installation. As a standalone device, the GV-Pad does not require an extra monitor and yet it supports almost all the features of a GV-IP Decoder Box. Through the network, a GV-Pad can receive and manage up to 64 IP streams simultaneously. The administrators can monitor channels, take snapshots, pause at a specific channel and control GeoVision PTZ cameras such as GV-PTZ010D, GV-PT110D and GV-IP Speed Dome through a connected GV-Joystick.

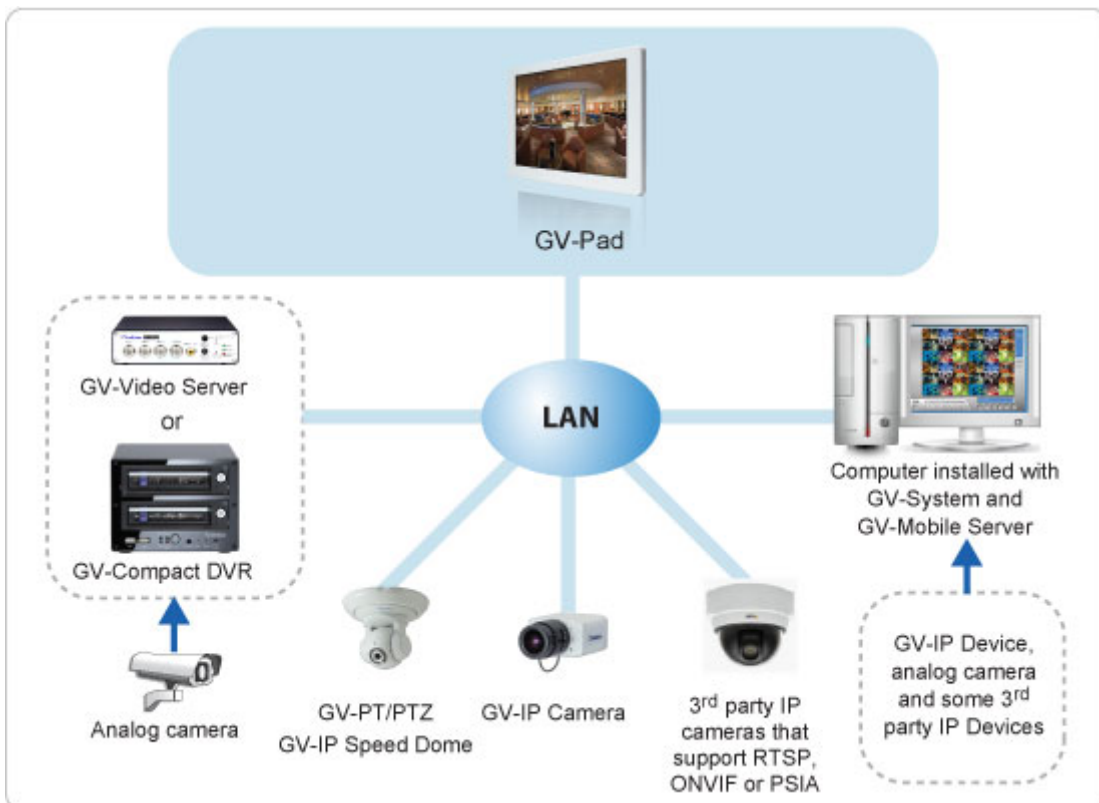

Features

- Decode video streams in H.264 codec at a maximum frame rate of the IP device
- Decode up to 5 megapixel IP cameras
- Decode up to 64 IP streams
- Support for 3rd party IP cameras that adhere to RTSP, ONVIF or PSIA
- Support for 10/100 Ethernet over LAN
- Support for single and sequential display
- Support for GV-Joystick control of GV PTZ cameras (GV-PTZ010D and GV-PT110D) and GV-IP Speed Dome
- Support for remote firmware upgrade, IP address configuration and addition of new channel
- Display of Matrix view through GV-Mobile Server
- IR remote control
- SD card and USB drive for snapshot storage and firmware upgrade

* No SD/SDHC card slot & local storage function for Argentina.

Compatible Devices

The GV-Pad is compatible with:

1. Most GeoVision IP devices (of the indicated firmware versions) using H.264 codec, and
2. Third-party IP devices that support H.264 and adhere to RTSP, ONVIF or PSIA.

Supported GeoVision IP Devices		
Device Type	Models	Firmware Versions
Box Camera	GV-BX110D	V1.08 or later
	All models (except GV-BX110D)	V1.06 or later
Bullet Camera	GV-BL110D	V1.08 or later
	All models (except GV-BL110D)	V1.06 or later
Cube Camera Fixed Dome Vandal Proof IP Dome	All models	V1.06 or later
Mini Fixed Dome	GV-MFD110	V1.08 or later
	All models (except GV-MFD110)	V1.06 or later
PT Camera PTZ Camera	GV-PT110D GV-PTZ010D	V1.08 or later
Speed Dome	All models	V1.02 or later
Video Server	GV-VS04H	V1.04 or later
Video Server	GV-VS11	V1.0 or later
Video Server	GV-VS12	V1.05 or later
Compact DVR	GV-Compact DVR V3 series only	V1.0 or later

To decode and display **non-H.264** IP channels or **analog** channels, connect the devices to GV-System and access them through GV-Mobile Server. The supported devices are listed below.

Supported Devices Connected to GV-System
Analog cameras
All models of GeoVision IP cameras, GV-Video Server, GV-Compact DVR, GV-IP Speed Dome, GV-Smart Box and GV-DSP LPR
11 brands of third-party IP cameras. For detail, see http://www.geovision.com.tw/english/4_21.asp

SPECIFICATIONS

Video		
Video Codec	H.264	
Resolution	1280 x 800	
Network		
Interface	10/100 Ethernet	
Protocol	TCP, RTSP, ONVIF, PSIA	
Mechanical		
IR Remote Control	Yes	
Connectors	Power	12V DC Jack
	Ethernet	RJ-45
	Local Storage & Firmware	USB slot (2.0 backward compatible, FAT32 format)
	Upgrade	SD card slot (for Class 6 or above, FAT32 format)
General		
Operating Temperature	0 °C ~ 40 °C / 32 °F ~ 104 °F	
Operating Humidity	20 % ~ 80 % (with no condensation)	
Color	Black, White	
Dimensions (W x H x D)	342.8 x 220.3 x 38.3 mm / 13.5 x 8.7 x 1.5 in	
Net Weight	1160 g / 2.6 lb	
Power	DC 12 V	
Power Consumption	36 W (max. 3 A at 12V DC)	
Regulatory	CE, FCC compliant	

Note: Specifications are subject to change without notice.

Overview

Right View




Left View



IR Remote Control



Accessories

Name	Details
 <p>GV-Joystick</p>	<p>Connected to GV-IP Decoder Box / GV-Pad to control GV PTZ cameras including GV-PT110D, GV-PTZ010D and GV-IP Speed Dome.</p>