


GV-Hot Swap Recording Server System - 3U, 16 / 8-Bay



INTRODUCTION

The GV-Hot Swap Recording Server System is a video streaming server supported by a powerful data storage capacity and designed for large-scale video surveillance deployments. The 20 hot-swappable SATA hard disks can store more than 40 terabytes of recorded data depending on the HDD size.


The built-in GV-Recording Server can receive and record up to 128 channels from various IP video devices. In addition, it can simultaneously distribute up to 300 channels to its clients which include GV-System (DVR/NVR system), GV-Control Center (central monitoring system) and Multi View (viewing software). Using the GV-Recording Server, the desired frame rates can be reached while the CPU loading and the bandwidth usage of IP video devices are significantly reduced.

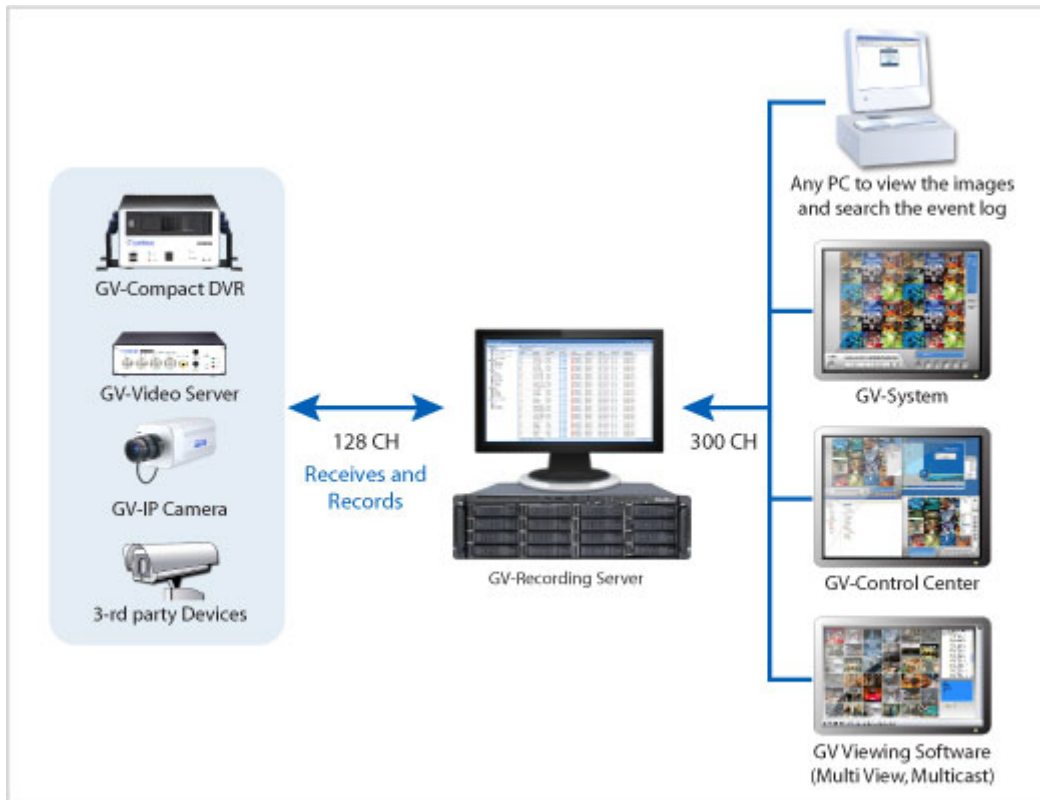

Note: The arrows in the diagram indicate the direction of the connections.

NETWORK DEPLOYMENT

- The GV-Hot Swap Recording Server System, equipped with 3 network interface cards, has the capacity of receiving 128 channels and transmitting 300 channels to clients. It is recommended to set one network interface card for receiving video and two network interface cards for transmitting to clients.

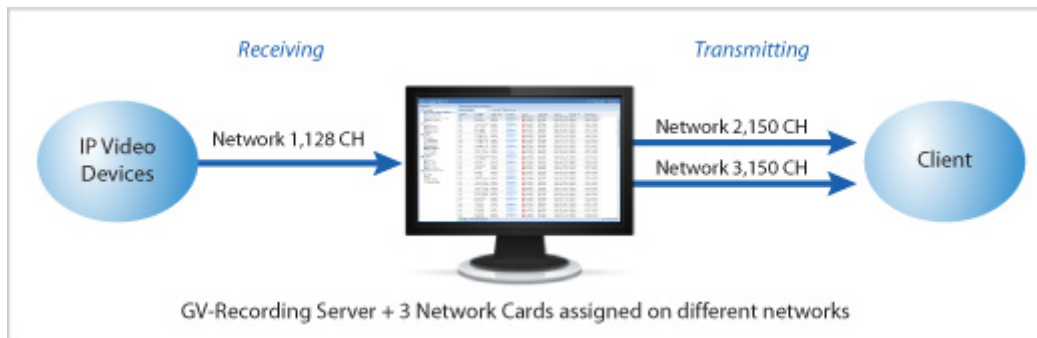

Features

- Windows Embedded 7 64-bit (x64)
- Powered by 2nd Generation Intel® Core™ i7 Processor
- 16 / 8 hot-swappable SATA drive bays for data storage
- Maximum storage capacity of more than 32 terabytes
- Simultaneous receiving and recording up to 128 IP channels
- Distributing up to 300 IP channels of video to clients
- Three Gigabit LAN ports
- Eight USB 2.0 ports and two USB 3.0 ports
- Recovery DVD in case of failure
- Web interface to remotely configure and monitor GV-Recording Server
- Two-way audio communication (only for GV-IP devices through active connection)
- Support for third-party IP video devices (Sony, Axis, VIVOTEK, Panasonic, HikVision, Arecont Vision)
- Support for ONVIF, PSIA and RTSP protocols
- Support for 16 languages



Specifications

| Hardware Specifications | | |
|-------------------------|----------------|--|
| CPU | | 2nd Generation Intel® Core™ i7 Processor |
| RAM | | 8 GB Dual Channels |
| Drive Bay | | 16 / 8 bays |
| Operating System | | 64-bit Microsoft Windows 7 Embedded |
| Backup Type | | DVD+R (DL) / DVD-R (DL) / DVD+R / DVD+RW / DVD-R / DVD-RW / CD-R / CD-RW |
| Recovery DVD | | Automatic system rebuild |
| Connector | Ethernet | RJ-45, 10 / 100 / 1000 Mbps x 3 |
| | Monitor Output | DB-15 VGA Monitor Output, DVI-DL Output (DVI-D signal Only), HDMI Output |
| | USB 2.0 | Front : 2 ports, Rear : 6 ports |
| | USB 3.0 | Rear: 2 ports |
| Remote Access | | TCP/ IP, LAN, WAN, Internet, Modem Dial-up, Modem-to-Modem, ISDN |
| Operating Temp. | | 0 ~ 45 °C (32 ~113 °F) |
| Humidity | | 0 ~ 80% RH (non-condensing) |
| Dimensions (W x H x D) | 16-Bay | 430 x 132.5 x 650 mm / 17 x 5.2 x 25.5 in |
| | 8-Bay | 430 x 132.5 x 580 mm / 17 x 5.2 x 22.8 in |

| Software Specifications | |
|---------------------------------------|--|
| Number of IP Video Device Connections | 128 channels |
| Number of Remote Client Connections | 300 channels |
| Active Connections | Yes |
| Passive Connections | Yes (only for GV IP devices) |
| 3rd Party IP Cameras Support | Yes |
| Live Viewing | Single live view, multi-channel live view |
| Recording | Yes (up to 128 channels) |
| Protocol | HTTP, HTTPS, TCP, UDP, SMTP, UPnP, DynDNS, RTSP, PSIA, ONVIF |
| E-Mail Notification | Yes (for Active connection lost, passive connection lost, USB protection key removed, recycling of recorded video, start keep days operation, motion detection, disk full, disk error, I/O trigger, disk removed, recording failure) |
| SMS Notification | No |
| 2-Way Audio | Yes (only for GV-IP devices through active connection) |
| GPS support | Yes (only for GV-IP cameras) |
| Number of Accounts | Up to 1000 accounts |
| Mobile Phone Support | No |
| Bandwidth Control | No |
| IE Live View | Yes (up to 36 channels) |
| IE Event Query | Yes |
| IE I/O Control | No |
| Language | Czech / Danish / English / French / German / Hebrew / Hungarian / Italian / Japanese / Polish / Portuguese / Russian / Serbian / Simplified Chinese / Spanish / Traditional Chinese |

Note:

1. The HDD capacity was determined using H.264 codec.
2. Specifications are subject to change without notice.

HDD Capacity

The amount of time GV-Hot Swap Recording Server System can record before recycling begins is listed below.

| Resolution | Frame Rate | Bit rate | HDD capacity required for recording 128ch | HDD Capacity for each model | Amount of time each model can record before recycling begins |
|------------|------------|----------|---|-----------------------------|--|
| 1.3 M | 30 fps | 3.7 Mbps | 5.3 TB per 24 hr | 4-bay (8 TB) | 8 TB / 5.3 TB = 36 hrs |
| | | | | 8-bay (16 TB) | 16 TB / 5.3 TB = 3 days |
| | | | | 16-bay (32 TB) | 32 TB / 5.3 TB = 6 days |
| | | | | 20-bay (40 TB) | 40 TB / 5.3 TB = 7 days 12 hrs |
| 2.0 M | 30 fps | 6.7 Mbps | 9.3 TB per 24 hr | 4-bay (8 TB) | 8 TB / 9.3 TB = 20 hrs |
| | | | | 8-bay (16 TB) | 16 TB / 9.3 TB = 1 day 17 hrs |
| | | | | 16-bay (32 TB) | 32 TB / 9.3 TB = 3 days 10 hrs |
| | | | | 20-bay (40 TB) | 40 TB / 9.3 TB = 4 days 7 hrs |
| 3.0 M | 20 fps | 5.7 Mbps | 7.9 TB per 24 hr | 4-bay (8 TB) | 8 TB / 7.9 TB = 24 hrs |
| | | | | 8-bay (16 TB) | 16 TB / 7.9 TB = 2 days 6 hrs |
| | | | | 16-bay (32 TB) | 32 TB / 7.9 TB = 4 days 12 hrs |
| | | | | 20-bay (40 TB) | 40 TB / 7.9 TB = 5 days |

IP Camera Support List

The following camera brands and models have been tested for compatibility with GV-Recording Server. Note that GV-Recording Server V1.0 only supports IP devices with V8.4 or earlier versions listed under the GV S/W column in the support list. GV-Recording Server V1.1 only supports IP devices with V8.5 or earlier versions listed under the GV S/W column in the support list.

| | | | |
|-----------------------|-------------|------------------|------------------|
| Arecont Vision | AXIS | GeoVision | HikVision |
| Panasonic | Sony | VIVOTEK | Panasonic |

Compatible Standard and Protocol

GV-Recording Server also allows for integration with all other IP video devices compatible with ONVIF (V2.0), PSIA (V1.1) standards, or RTSP protocol.

| | | | |
|--------------|-------------|-------------|--|
| ONVIF | PSIA | RTSP | |
|--------------|-------------|-------------|--|